
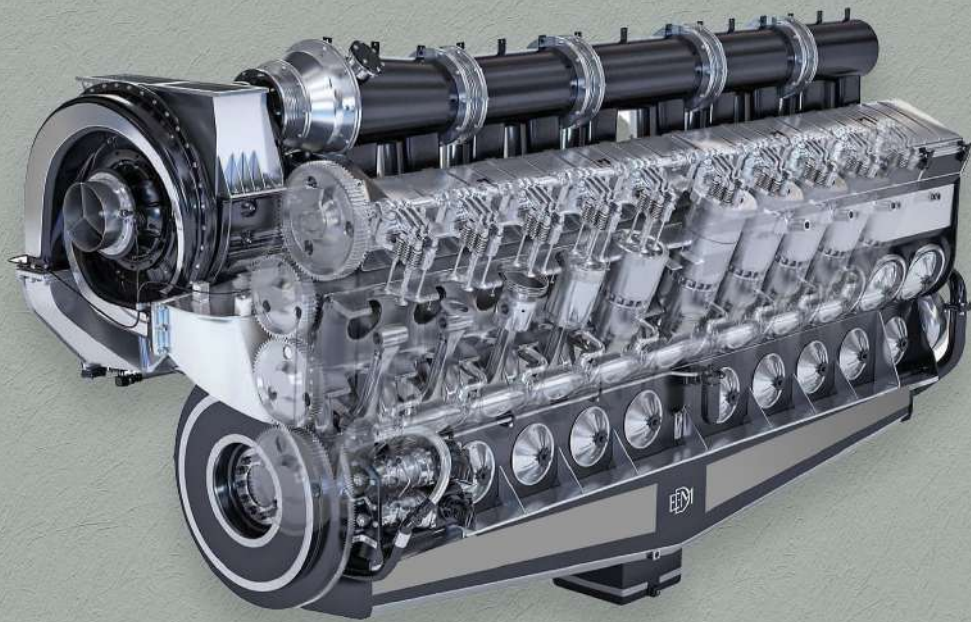


EMD DIESEL ENGINE SPARE PARTS

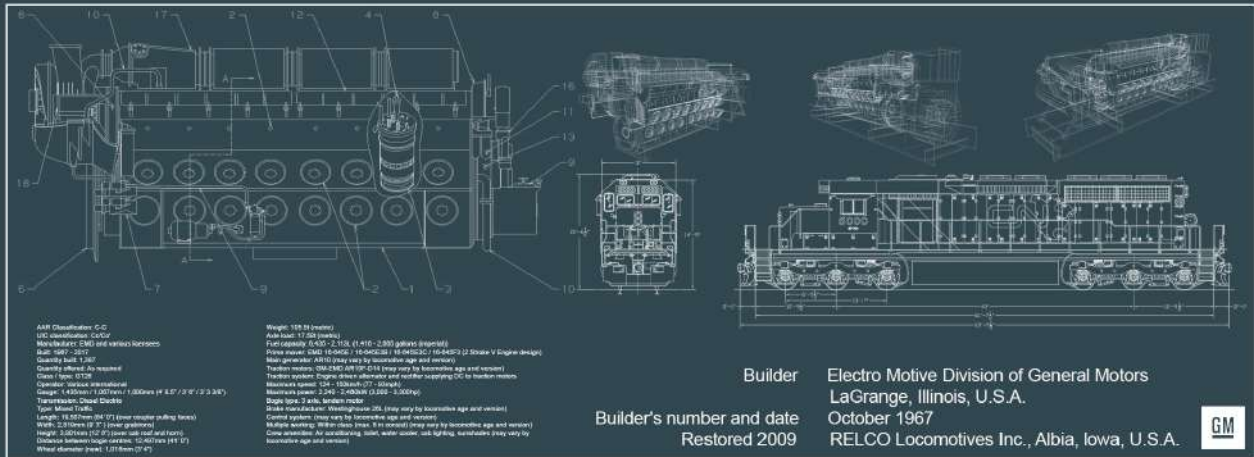

HALTIC ENDUSTRY CO.

WABCO

General Electric

EMD

GM

Hallic
WWW.HALTIC.NET

Gardner Denver


ALCO

CAT

GENERATOR AR10A5-D14 PARTS CATALOG:



1 - GENERATORAR10A5-D14

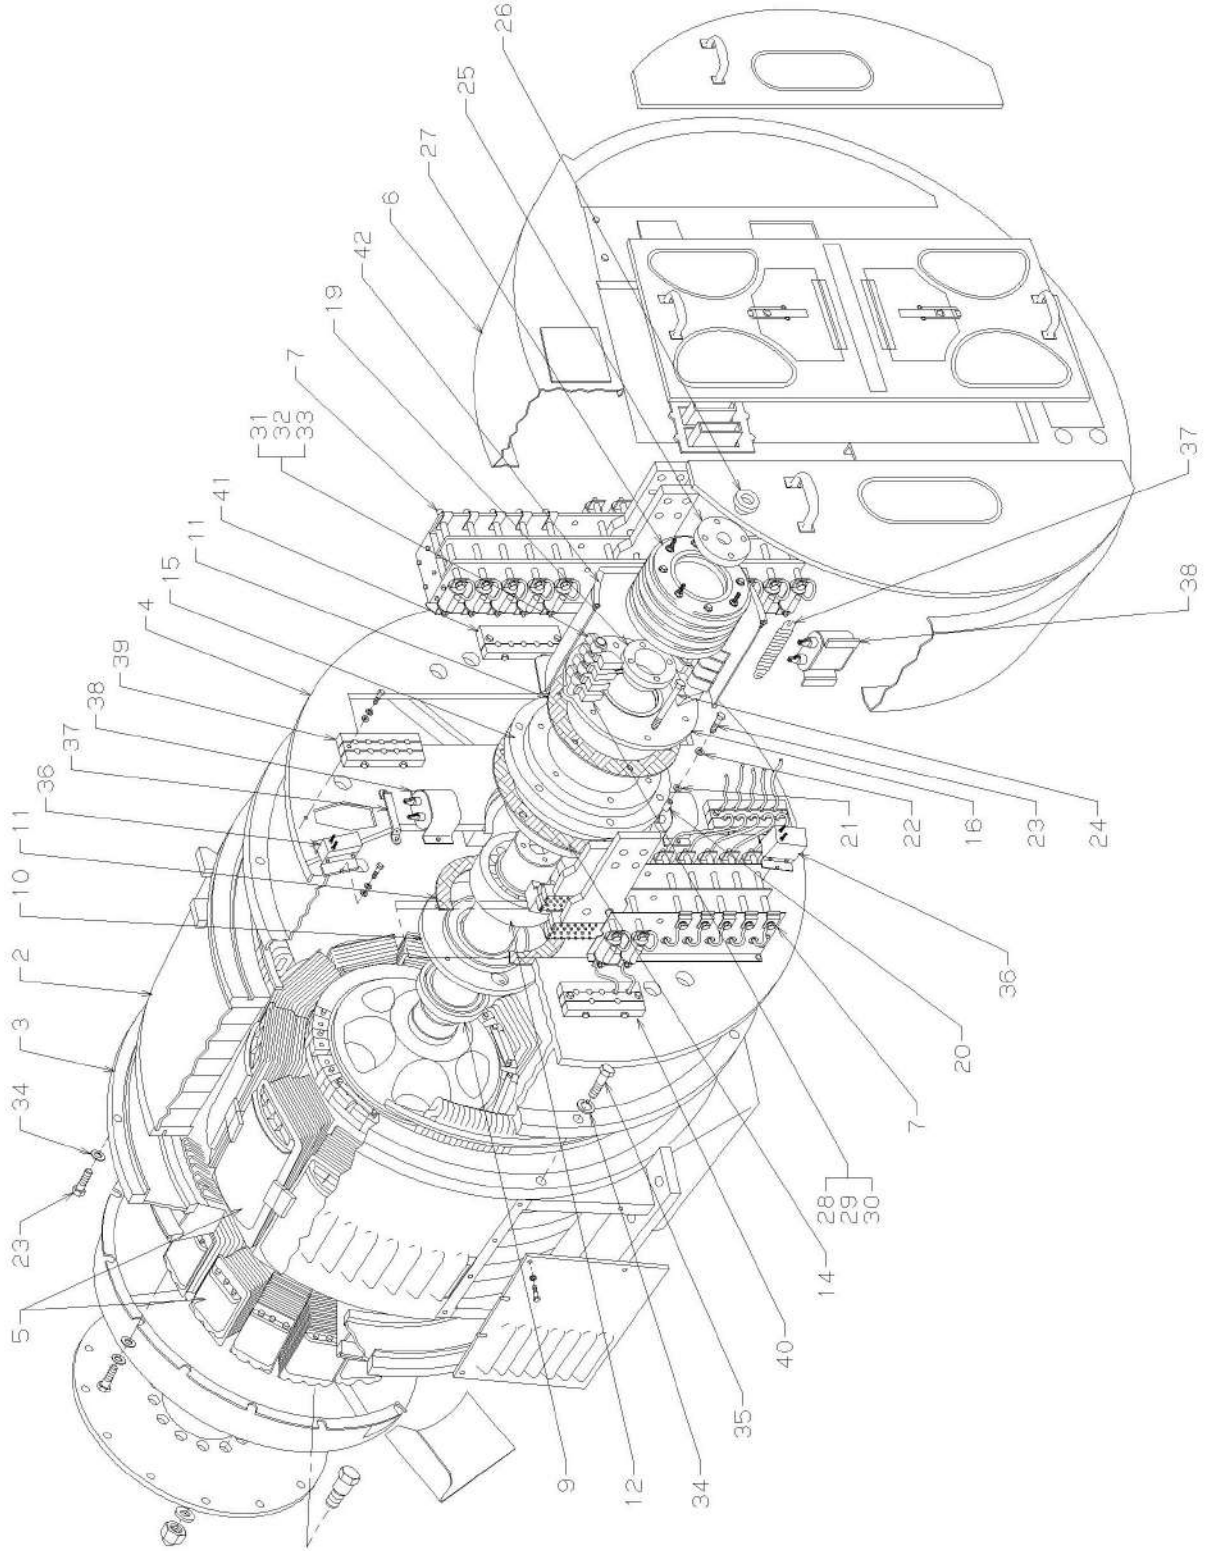



Haltic Endüstri İthalat İhracat ve Ticaret limited Sirketi.


REF. NO.	PART NUMBER	QTY	DESCRIPTION
REF.	8441144	1	GENERATOR ASSEMBLY .. AR10A5-D14
-2	8356273	1	STATOR ASSEMBLY .. GENERATOR-AR10A5
-3	40021950	1	STATOR ASSEMBLY .. ALTERNATOR-D14
-4	9320959	1	HOUSING ASSEMBLY .. END
-5	9337330	1	ROTOR ASSEMBLY .. GENERATOR - AR10A5-D14
-6	8421740	1	BOX EQUIPPED .. AIR-AR10A5-D14
-7	9084995	2	BANK ASSEMBLY .. RECTIFIER - GENERATOR
-8	8390572	1	CLOSURE ASSEMBLY .. STATOR (NOTSHOWN)
-9	8405528	1	SEAL .. BEARING - GENERATOR, INNER
-10	8418657	1	CAP .. BEARING - GENERATOR
-11	8418959	2	GASKET .. BEARING CAP AND COVER - GENERATOR
-12	9442069	1	BEARING .. ROLLER - GENERATOR (WITHOUT GREASE HOLE - OPTIONAL)
-13	9507146	AR	GREASE .. BEARING - GENERATOR - 35 POUND PAIL - 33 OUNCES REQUIRED (NOTSHOWN)
-13	9507147	AR	GREASE .. BEARING - GENERATOR - 120 POUND DRUM (OPTIONAL-NOTSHOWN)
-14	8418962	1	RING .. INSULATING -BEARING HOUSING, GENERATOR
-15	8418960	1	HOUSING ASSEMBLY .. BEARING - GENERATOR
-16	8418689	1	COVER ASSEMBLY .. BEARING - GENERATOR
-17	8405881	2	STUD .. BRUSH HOLDER (NOTSHOWN)
-18	8405880	2	TUBE .. INSULATION (NOTSHOWN)
-19	8405527	1	SEAL .. BEARING - OUTER
-20	8405536	8	TUBE .. INSULATING - BEARING HOUSING BOLT - 0.958 INCH LONG
-21	9531329	8	WASHER .. INSULATING
-22	9531331	8	WASHER .. SPECIAL 1-1/2 O.D. * 25/32 I.D. * 3/16 INCH THICK
-23	271773	22	BOLT .. HEX HEAD 3/4-10 * 2-1/2
-24	443734	6	BOLT .. HEX HEAD 1/2-13 * 6 BEARING CAP AND COVER
-25	8345873	1	PLATE .. RETAINING - SLIPRING, GENERATOR
-26	8441790	1	GROMMET .. CABLE - ROTOR COIL TO SLIP RING
-27	8345866	1	RING ASSEMBLY .. SLIP-COLLECTOR-GENERATOR
-28	8413189	4	HOLDER ASSEMBLY .. BRUSH-GENERATOR, AR10
-29	8434285	4	SPRING .. BRUSH HOLDER



Haltic Endüstri İthalat İhracat ve Ticaret limited Sirketi.

REF. NO.	PART NUMBER	QTY	DESCRIPTION
-30	40034666	4	BRUSH .. CARBON - AR10 - GRADE N39
-31	8413188	4	HOLDER ASSEMBLY .. BRUSH D14
-32	8434285	4	SPRING .. BRUSH HOLDER
-33	8413190	4	BRUSH .. CARBON D14 GRADE AY
-34	131046	22	WASHER .. LOCK 3/4
-35	271774	8	BOLT .. HEX HEAD 3/4-10 * 2-3/4
-36	8374003	3	TRANSFORMER .. CURRENT GENERATOR
-37	8380922	6	RESISTOR .. FILTER-GENERATOR, 50HMS - 50WATTS
-38	9332014	6	CAPACITOR .. FILTER-GENERATOR
-39	8398093	2	CLEAT ASSEMBLY .. CABLE - ALTERNATOR
-40	8398094	1	CLEAT ASSEMBLY .. CABLE
-41	8398095	1	CLEAT ASSEMBLY .. CABLE
-42	8433714	1	COVER ASSEMBLY .. SLIPRINGS
-43	8497822	1	SEAL .. COVER - 55 INCHES LONG (NOTSHOWN)
-44	8408426	1	SUPPORT .. CABLE (NOTSHOWN)
-45	9562319	1	NAME PLATE .. HIGH VOLTAGE (NOTSHOWN)

2 - GENERATOR STATOR- AR10A5

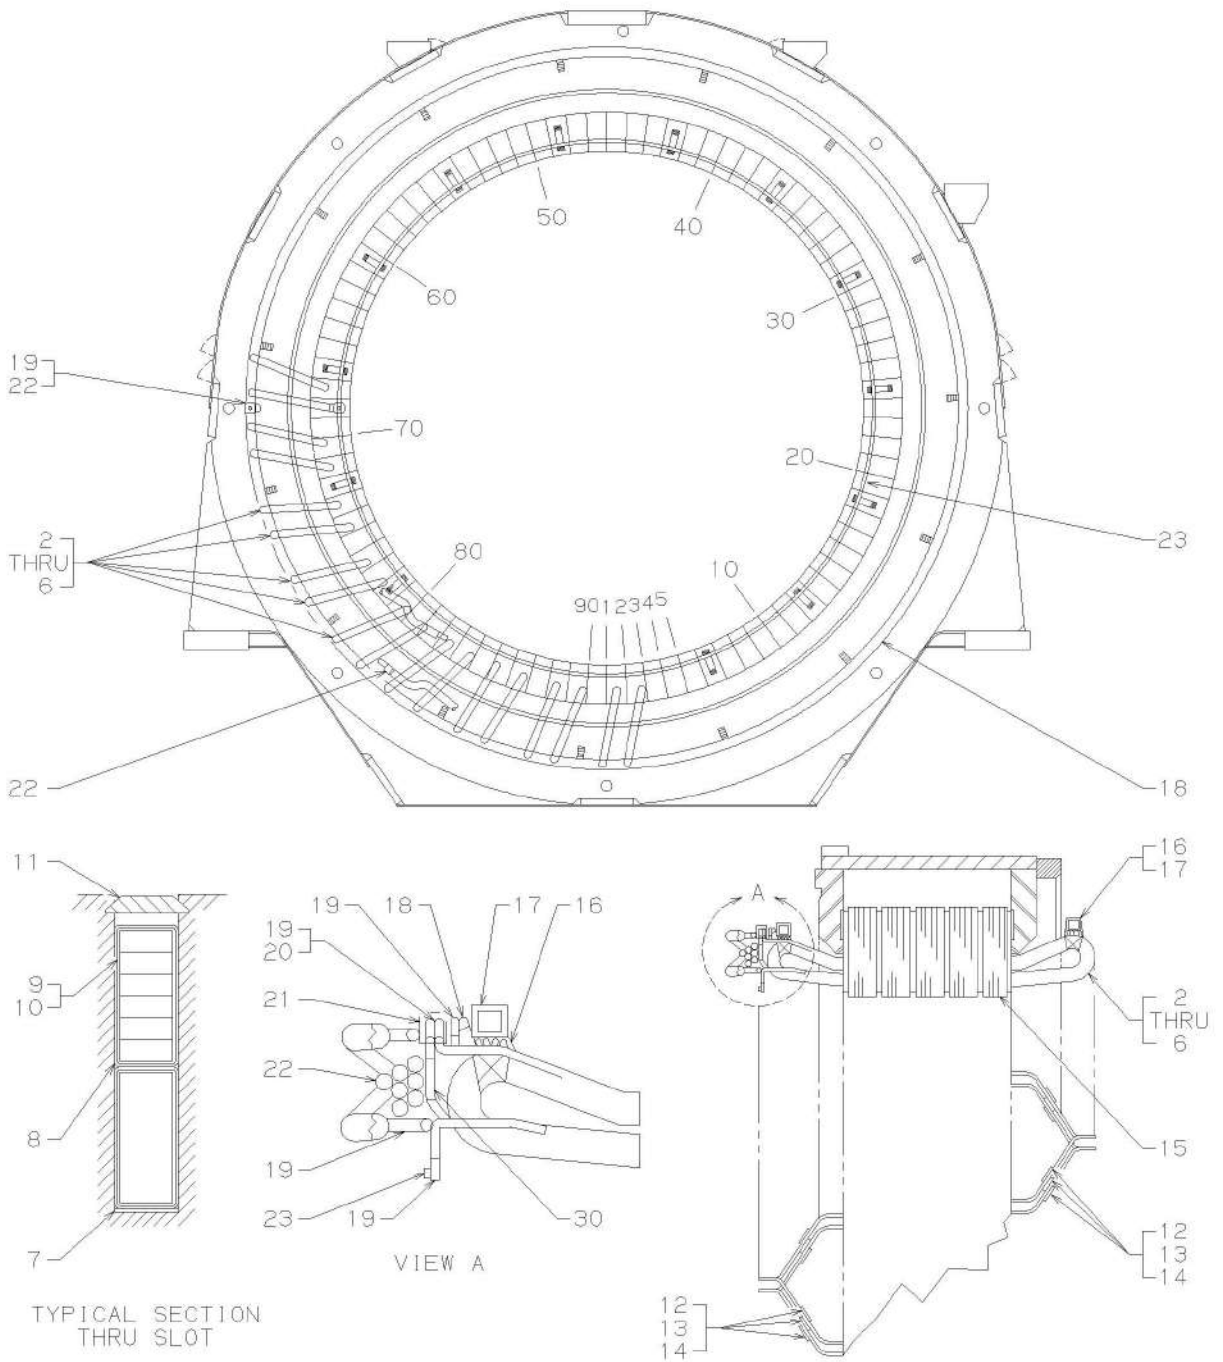




Haltic Endüstri İthalat İhracat ve Ticaret limited Sirketi.

REF.	PART NUMBER	QTY	DESCRIPTION
REF.	8356273	1	STATOR ASSEMBLY .. GENERATOR - AR10A5 - UTEXNO.: 8466881
-2	8355831	15	COIL ASSEMBLY .. STATOR
-3	8355832	15	COIL ASSEMBLY .. STATOR
-4	8355833	15	COIL ASSEMBLY .. STATOR
-5	8355834	30	COIL ASSEMBLY .. STATOR
-6	8355835	15	COIL ASSEMBLY .. STATOR STATOR COILS ARE ARRANGED IN LOWER SLOTS AS FOLLOWS: REF. NO. 2 IN SLOTS 2, 8, 14, 20, 26, 32, 38, 44, 50, 56, 62, 68, 74, 80 AND 86. REF. NO. 3 IN SLOTS 4, 10, 16, 22, 28, 34, 40, 46, 52, 58, 64, 70, 76, 82 AND 88. REF. NO. 4 IN SLOTS 5, 11, 17, 23, 29, 35, 41, 47, 53, 59, 65, 71, 77, 83 AND 89. REF. NO. 5 IN SLOTS 3, 6, 9, 12, 15, 18, 21, 24, 27, 30, 33, 36, 39, 42, 45, 48, 51, 54, 57, 60, 63, 66, 69, 72, 75, 78, 81, 84, 87 AND 90. REF. NO. 6 IN SLOTS 1, 7, 13, 19, 25, 31, 37, 43, 49, 55, 61, 67, 73, 79 AND 85.
-7	8332820	90	INSULATION .. STATOR - LOWER COIL TO FRAME
-8	8479989	90	INSULATION .. STATOR - UPPER COIL TO LOWER COIL
-9	8456529	60	INSULATION .. STATOR - UPPER COIL TO WEDGE - 0.010 THICK
-10	9099485	270	INSULATION .. STATOR-UPPER COIL TO WEDGE - .020THICK
-11	8329702	180	WEDGE .. SLOT - GENERATOR STATOR
-12	8352755	236	BLOCK .. COIL BRAZING - GENERATOR STATOR - 1/8
-13	8352756	287	BLOCK .. COIL BRAZING - 3/16
-14	8352757	57	BLOCK .. COIL BRAZING - 1/4
-15	8354022	180	INSULATION .. COIL - "U" PIECE
-16	9087173	2	PAD .. COIL SUPPORTRING - 12 FEET 6INCHES LONG
-17	9087166	2	RING ASSEMBLY .. COIL SUPPORT, 47-5/8 INCH I.D.
-18	8358529	1	RING .. BUS BAR - OUTER 50-1/2 INCH I.D.
-19	40055495	AR	ALLOY .. BRAZING - POUND CAN
-20	8355965	60	SPACER .. PAD - COIL LEAD, 0.550 * 7/16 * 0.047 COPPER
-21	8356451	60	BOOT .. INSULATING - COIL LEAD - RUBBER
-22	40053596	AR	CABLE .. COIL CONNECTION - GENERATOR STATOR -SRG-D INSULATION, 50FEET-(APPROX. 130 FEET REQUIRED)
-23	8355964	1	RING .. BUS BAR - INNER 40-1/2 INCH I.D.
-24	8398091	31	LUG .. TERMINAL -90° BEND - 0.331 STUD (NOTSHOWN)
-25	8401144	27	LUG .. TERMINAL - 90° BEND - 0.395 (NOTSHOWN)
-26	8401197	32	SLEEVE .. CABLE INSULATION 5-1/2 INCHES LONG (NOTSHOWN)

REF.	PART NU MBER	QTY	DESCRIPTION
-27	8473161	1	LUG .. TERMINAL - STRAIGHT - 0.331 STUD (NOTSHOWN)
-28	8466178	2	LUG .. TERMINAL - 90° BEND, BLANK (NOTSHOWN)
-29	8401143	3	LUG .. TERMINAL - STRAIGHT - 0.395 (NOTSHOWN)
-30	8442613	60	SLEEVING .. INSULATING - COILLEAD

3 - ALTERNATOR STATOR - D14

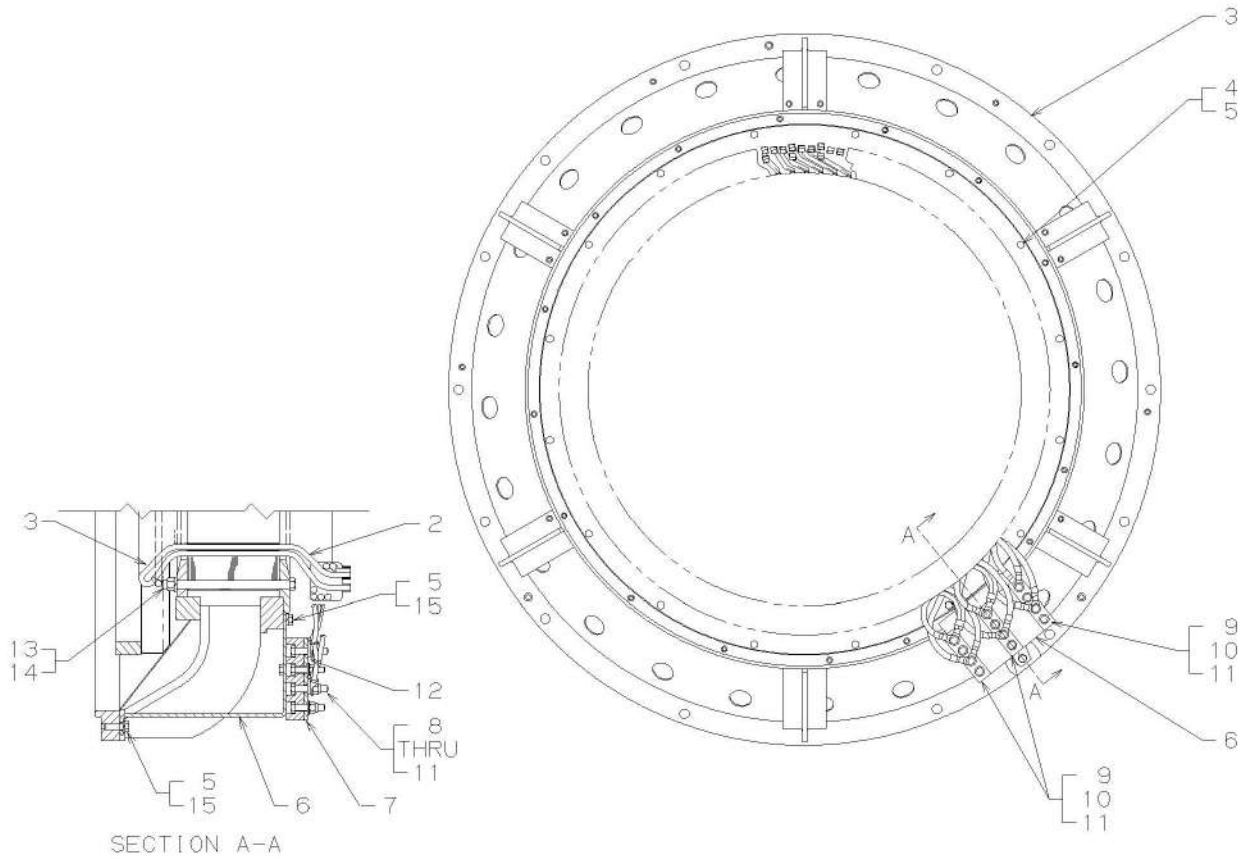




Haltic Endüstri İthalat İhracat ve Ticaret limited Sirketi.

REF. NO.	PART NUMBER	QTY	DESCRIPTION
REF.	40021950	1	STATOR ASSEMBLY .. ALTERNATOR D14 - INCLUDES END FRAME WITHOUT BAFFLES
-2	40021949	1	WINDING ASSEMBLY .. GENERATOR STATOR - INCLUDES INSULATION AND COILS
-3	8421842	1	FRAME ASSEMBLY .. ALTERNATOR
-4	180124	16	BOLT .. HEX HEAD 3/8-16 * 1-1/4
-5	120382	19	WASHER .. LOCK - 3/8
-6	8422220	1	BOARD ASSEMBLY .. TERMINAL - ALTERNATOR 12POINT
-7	8422649	1	BOARD ASSEMBLY .. TERMINAL
-8	180128	12	BOLT .. HEX HEAD 3/8-16 * 1-3/4
-9	8422650	3	BAR .. BUS - TERMINAL BOARD
-10	120394	12	WASHER .. FLAT 3/8
-11	8035146	12	NUT .. HEX LOCK 3/8-16
-12	9553618	1	SHEET ASSEMBLY .. TERMINAL
-13	8152310	2	SPACER .. TERMINAL BOARD
-14	124829	2	NUT .. HEX JAM 3/8-16
-15	180120	3	BOLT .. HEX HEAD 3/8-16 * 3/4

4 - COLLECTORRING

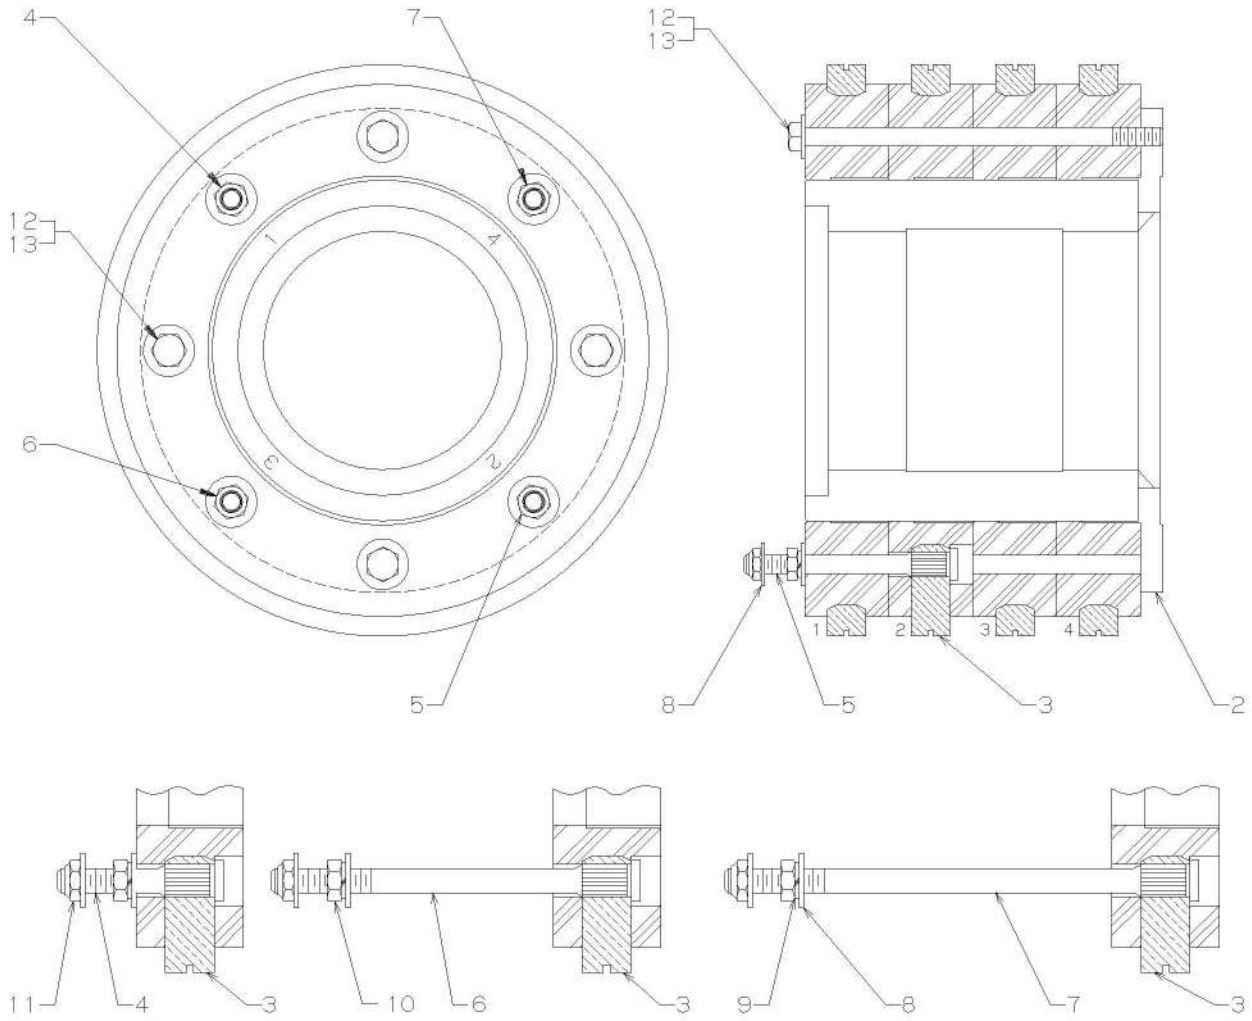


REF.NO.	PART NUMBER	QTY	DESCRIPTION
REF.	8345866	1	RING ASSEMBLY .. SLIP - COLLECTOR
-2	8345732	1	HUB ASSEMBLY .. SLIPRING
-3	8345690	4	RING .. COLLECTOR - SPIRAL GROOVE
-4	8310267	1	STUD .. 3/8-16 * 2-3/8 INCHES LONG - NO.1 TERMINAL



Haltic Endüstri İthalat İhracat ve Ticaret limited Şirketi.

REF.NO.	PART NUMBER	QTY	DESCRIPTION
-5	8310266	1	STUD .. 3/8-16 * 4 INCHES LONG - NO.2 TERMINAL
-6	8345700	1	STUD .. 3/8-16 * 5-5/8 INCHES LONG - NO.3 TERMINAL
-7	8345701	1	STUD .. 3/8-16 * 7-1/4 INCHES LONG - NO.4 TERMINAL
-8	116093	12	WASHER .. FLAT 3/8 - BRASS
-9	120382	4	WASHER .. LOCK 3/8
-10	140634	4	NUT .. HEX JAM 3/8-16
-11	8032846	4	NUT .. HEX LOCK 3/8-16
-12	9422563	4	BOLT .. HEX HEAD 3/8-16 * 7 - COLLECTOR RING MOUNTING TO HUB
-13	116093	4	WASHER .. FLAT 3/8 - BRASS

5 - AIR BOX

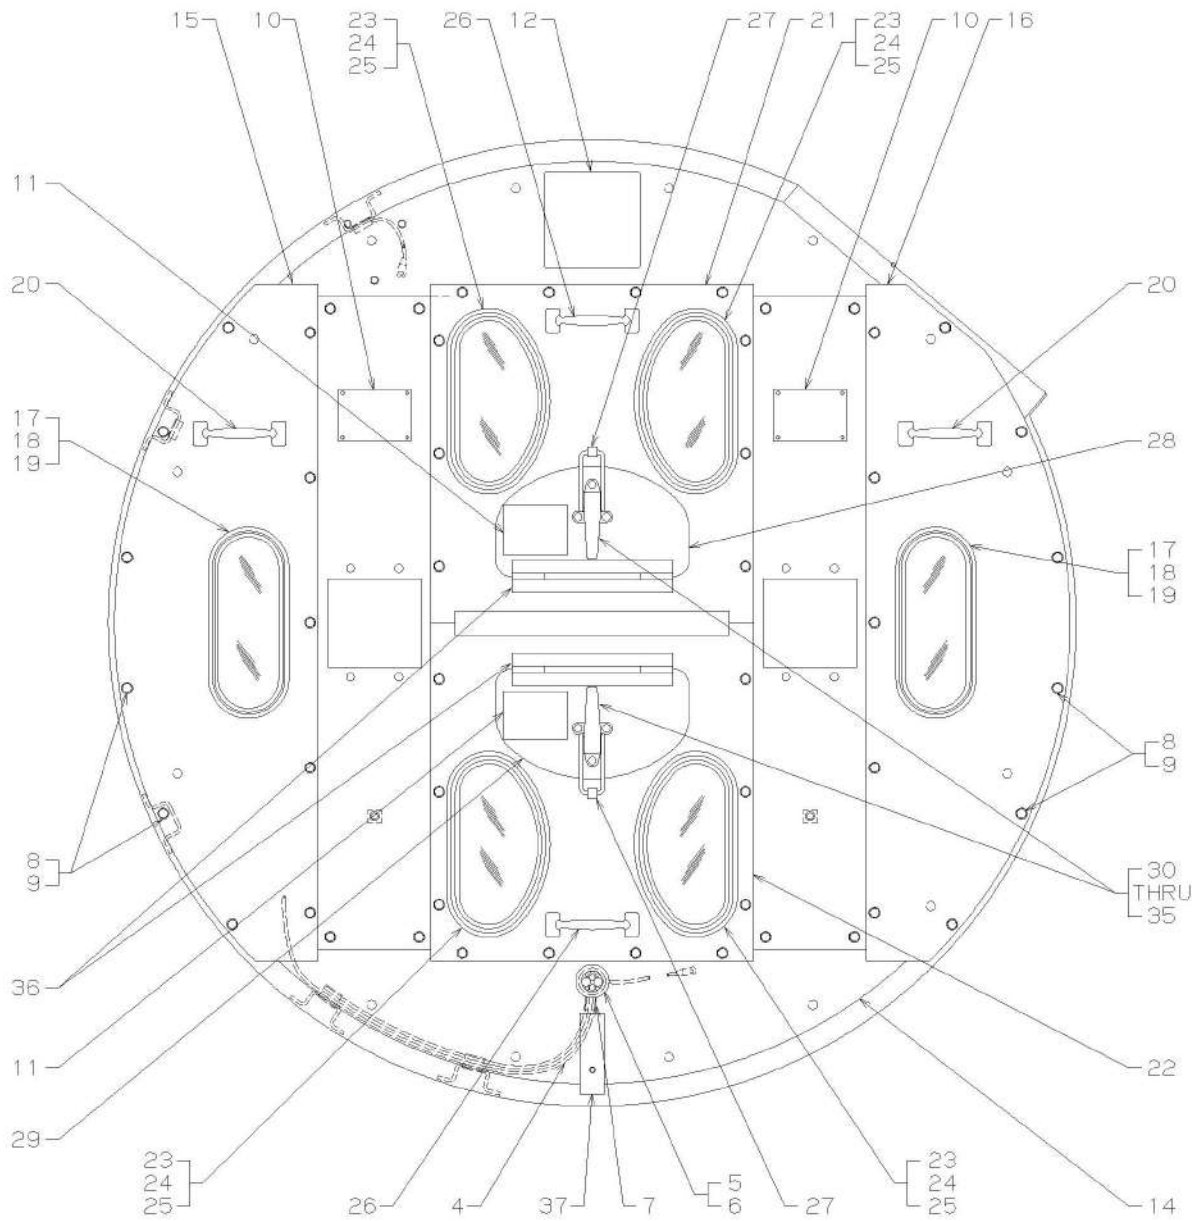

REF. NO.	PART NUMBER	QTY	DESCRIPTION
REF. 8421740	1		BOX EQUIPPED .. AIR - AR10A5-D14



Haltic Endüstri İthalat İhracat ve Ticaret limited Sirketi.


REF. NO.	PART NUMBER	QTY	DESCRIPTION
-2	9326091	AR	CABLE .. JUMPER - BRUSH HOLDER TO BRUSH HOLDER - 1J, 2J, 1, 2 - 8AWG -37/24 LF INSULATION - 500 FOOT (12 FEET REQUIRED -NOTSHOWN)
-2A	8126873	8	LUG .. TERMINAL - 5/16- NO.8 AWG - 37/24 (NOTSHOWN)
-3	9326093	AR	CABLE .. JUMPER - BRUSH HOLDER TO BRUSH HOLDER - 3J ,4J, 3, 4 - 3 AWG - 125/24 LF INSULATION - 100 FOOT (11 FEET REQUIRED-NOTSHOWN)
-3A	8130630	8	LUG .. TERMINAL -5/16 - NO.3 AWG - 125/24
-4	8468612	AR	CABLE .. TRANSFORMER -01 ,02 ,1A ,B ,C ,2A ,B ,C - NO.12 AWG LF INSULATION - 500 FOOT (29 FEET REQUIRED - NOTSHOWN)
-4A	8292367	5	LUG .. TERMINAL 1/4 -NON INSULATED - CRIMP TYPE - NO.10 TO 14 WIRE (NOTSHOWN)
-4B	8301545	5	LUG .. TERMINAL 3/8 - NON INSULATED - CRIMP TYPE - NO.10 TO 14 WIRE (NOTSHOWN)
-5	8038646	1	BUSHING .. INSULATING 1-1/4 INCH - MALE
-6	8038597	1	BUSHING .. INSULATING 1-1/4 INCH - FEMALE
-7	8160085	AR	TAPE .. ELECTRICAL - 3/4 INCH * 30 YARDS (APPROX. 12FEET REQUIRED)
-8	180121	26	BOLT .. HEX HEAD 3/8 - 16 * 7/8- COVER MOUNTING
-9	120382	26	WASHER .. LOCK 3/8
-10	9562319	2	NAME PLATE .. HIGH VOLTAGE
-11	9536850	2	NAME PLATE .. DANGER 250V
-12	8444397	1	NAME PLATE .. CAUTION
-13	145371	16	SCREW .. DRIVE NO.2R - NAME PLATE MOUNTING (NOTSHOWN)
-14	9577351	1	BOX ASSEMBLY .. AIR - AR10A5-D14
-15	8420793	1	COVER ASSEMBLY .. AIRBOX - LEFTSIDE
-16	8420795	1	COVER ASSEMBLY .. AIRBOX - RIGHTSIDE
			THE FOLLOWING COMPONENTS, REF. NOS. 17 THRU 20, ARE APPLICABLE TO EACH AIR BOX COVER ASSEMBLY UNLESS OTHERWISE SPECIFIED.
-17	8345780	1	GLASS .. INSPECTION WINDOW - AIRBOX
-18	8167425	1	WEATHER STRIP .. GLASS - AIRBOX - SOLD PER FOOT (28-1/2 INCHES REQUIRED PER GLASS)
-19	8166637	AR	WEATHER STRIP .. FILLER - 100 FOOT (28-1/2 INCHES REQUIRED PER GLASS)
-20	8031902	1	HANDLE .. AIRBOX COVER
-21	8433674	1	COVER ASSEMBLY .. AIRBOX - UPPER CENTER
-22	8387424	1	COVER ASSEMBLY .. AIRBOX - LOWER CENTER - REPLACES 8433675
			THE FOLLOWING COMPONENTS, REF. NO. 23 THRU 27, ARE APPLICABLE TO EACH AIR BOX COVER ASSEMBLY UNLESS OTHERWISE SPECIFIED.
-23	8433679	2	GLASS .. INSPECTION WINDOW - AIRBOX
-24	8167425	1	WEATHER STRIP .. GLASS - AIRBOX - SOLD PER FOOT - (27-7/8 INCHES REQUIRED PER GLASS)
-25	8166637	AR	WEATHER STRIP .. FILLER - 100 FOOT - (27-7/8 INCHES REQUIRED PER GLASS)



Haltic Endüstri İthalat İhracat ve Ticaret limited Şirketi.

REF. NO.	PART NUMBER	QTY	DESCRIPTION
-26	8031902	1	HANDLE .. AIRBOX COVER
-27	8408606	1	HOOK .. DOOR
-28	8433677	1	DOOR ASSEMBLY .. AIRBOX (APPLIES TO 8433674 COVER ONLY)
-29	9503056	1	DOOR ASSEMBLY .. AIRBOX (APPLIES TO 8387424 COVER ONLY)
			THE FOLLOWING COMPONENTS, REF. NO. 30 THRU 36, ARE APPLICABLE TO EACH DOOR ASSEMBLY UNLESS OTHERWISE SPECIFIED.
-30	8082592	1	LATCH ASSEMBLY .. DOOR - ALTERNATOR AIRBOX
-31	8082473	1	HANDLE .. LATCH
-32	8082632	1	BRACKET .. LATCH
-33	8082406	1	SPRING .. LATCH
-34	453673	1	PIN .. SPRING - 3/8 * 1-3/8 HANDLE TO BRACKET
-35	104095	3	RIVET 5/16 * 1/2 - LATCH MOUNTING
-36	8433680	1	HINGE .. DOOR
-37	8332491	1	STUD ASSEMBLY .. PLATE

6 - GENERATOR ROTOR - AR10A5-D14

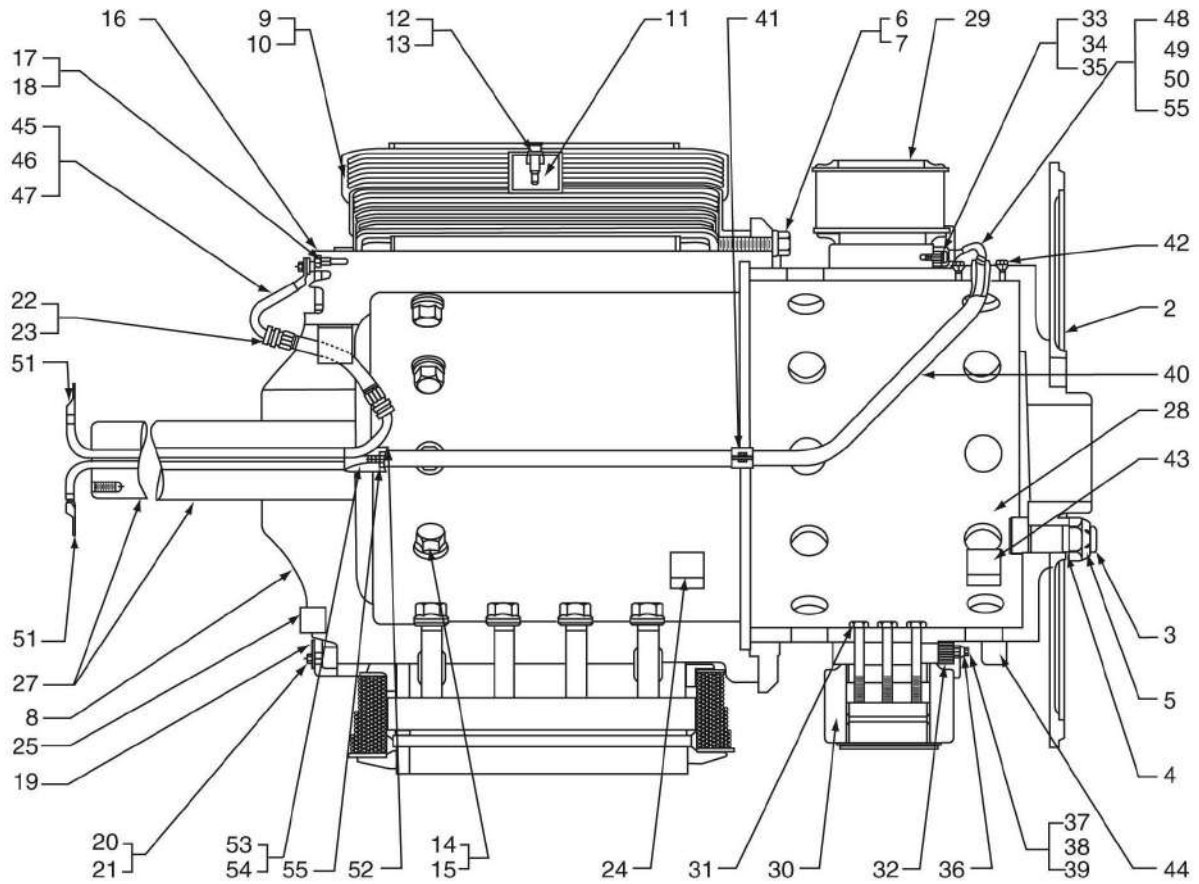

REF. NO.	PART NUMBER	QTY	DESCRIPTION
REF.	9337330	1	ROTOR ASSEMBLY.. GENERATOR - AR10A-D14 - DYNAMICALLY BALANCED
-1	9552506	1	DISC .. COUPLING - ALTERNATOR TO ENGINE
-2	8336209	6	BOLT .. OFFSET HEAD - 1-1/2 - 12 * 4-1/16 - COUPLING DISC
-3	8336210	6	WASHER .. SPECIAL HARDENED - 1-17/32 I.D. * 2-7/16 O.D. * 9/32 INCH THICK
-4	8334366	6	NUT .. LOCK - COUPLING DISC BOLT 1-1/2 - 12 HEX
-5	271659	16	BOLT .. ROTOR TO ROTOR - HEX HEAD 7/8-9 X 2-3/4
-6	103327	16	WASHER .. LOCK 7/8



Haltic Endüstri İthalat İhracat ve Ticaret limited Sirketi.


REF. NO.	PART NUMBER	QTY	DESCRIPTION
-7	9337241	1	ROTOR ASSEMBLY .. AR10A5 - WEDGED COILS
-8	8479055	5	COIL ASSEMBLY .. FIELD - GENERATOR - OPEN
-9	8479056	5	COIL ASSEMBLY .. FIELD - GENERATOR - CROSSED
-10	8479063	10	WEDGE .. FIELD COIL
-11	8479064	10	WASHER .. WEDGE SCREW
-12	8479065	10	SCREW .. WEDGE MOUNTING 1/2-13 * 1-1/4 HEX SOCKET CAP
-13	9320400	40	BOLT .. COIL MOUNTING 1-1/4-12 * 6-27/64 HEX HEAD - SPECIAL
-14	9320401	40	WASHER .. HARDENED 1.390 I.D. * 2-1/8 O.D. * 5/16 THICK
-15	8216795	10	BLOCK ASSEMBLY .. INSULATING - STRAIGHT
-16	9509470	10	BLOCK ASSEMBLY .. INSULATING - CURVED
-17	9418133	20	BOLT .. LOCK - INSULATING BLOCK 3/8-16 * 1 HEX HEAD
-18	9509486	20	WASHER .. HARDENED 13/32 I.D. * 13/16 O.D. * 1/8 THICK
-19	8380665	9	STRAP .. BUS - CROSSED COIL TO OPEN COIL
-20	9417958	20	BOLT .. LOCK - BUS STRAP 5/16-18 * 7/8 HEX HEAD
-21	120393	20	WASHER .. PLAIN 5/16
-22	8364763	1	CONDUIT ASSEMBLY .. ROTOR LEAD
-23	8068256	4	BUSHING ASSEMBLY .. STRAIN RELIEF
-24	8440296	AR	WEIGHT .. BALANCE - AR10 END - INNER 1 * 2 * 12 INCHES
-25	8246410	AR	BAR .. BALANCE - SHAFT END 1-1/2 * 1-1/2 * 12 INCHES
-26	9517971	AR	COATING .. BONDED - MOLYKOTE - 16 OZ. AEROSOL CAN - REPLACES 8168822 AND 9316707
-27	8405526	1	SHAFT .. ROTOR - 18-11/32 INCHES LG. - 4.790 BORE DIAMETER 8486100 .. 18-11/32 IN. LG. - 4.795 BORE DIA. - NO HUB SHOULDER 8486101 .. 18-11/32 IN. LG. - 4.810 BORE DIA. - NO HUB SHOULDER 8384777 .. 18-19/32 IN. LG. - 5.255 BORE DIA. - 0.490 HUB SHOULDER 8384776 .. 19-31/32 IN. LG. - 5.255 BORE DIA. - 0.990 HUB SHOULDER
-28	8345685	1	ROTOR ASSEMBLY .. D14
-28A	9556724	1	ROTOR ASSEMBLY .. CA5A
-29	8211467	8	COIL ASSEMBLY .. FIELD - OPEN - D14
-29A	9552356	8	COIL ASSEMBLY .. FIELD - ALTERNATOR - OPEN - CA5A
-30	8211468	8	COIL ASSEMBLY .. FIELD - CROSSED - D14
-30A	9552535	8	COIL ASSEMBLY .. FIELD - ALTERNATOR - CROSSED - CA5A
-31	223748	48	BOLT .. COIL MOUNTING - 5/8-18 * 4-1/2 HEX HEAD
-32	8127013	8	BLOCK ASSEMBLY .. INSULATING



Haltic Endüstri İthalat İhracat ve Ticaret limited Şirketi.

REF. NO.	PART NUMBER	QTY	DESCRIPTION
-33	180122	16	BOLT .. INSULATING BLOCK 3/8-16 HEX HEAD
-34	120394	16	WASHER .. PLAIN 3/8
-35	120382	16	WASHER .. LOCK 3/8
-36	8131993	15	CONNECTOR .. CROSSED COIL TO OPEN COIL - D14
-36A	8131993	12	STRIP .. BUSHING - CROSSED COIL TO OPEN COIL - CA5A
-37	180077	32	BOLT .. COIL CONNECTOR 5/16-18 * 3/4 HEX HEAD
-38	120393	32	WASHER .. PLAIN 5/16
-39	120214	32	WASHER .. LOCK 5/16
-40	8363892	1	CONDUIT ASSEMBLY .. ROTOR LEAD
-41	8345611	1	BRACKET ASSEMBLY .. CONDUIT MOUNTING
-42	9417959	4	BOLT .. LOCK - CONDUIT AND BRACKET 3/8-16 * 3/4 HEX HEAD
-43	8440296	AR	WEIGHT .. BALANCE - DISC END - INNER 1* 2 * 12 INCHES
-44	8246410	AR	BAR .. BALANCE - DISC END - OUTER 1-1/2 * 1-1/2 * 12 INCHES
-45	8345977	2	CABLE ASSEMBLY .. AR10 ROTOR TO COLLECTOR RING
-46	9326093	AR	CABLE .. 3 AWG. LF-100FT. (APPROX. 44 INCHES REQUIRED)
-47	8130630	2	LUG .. TERMINAL - 3 AWG CABLE - 5/16 STUD
-48	8345976	2	CABLE ASSEMBLY .. D14 ROTOR TO COLLECTOR RING
-48A	9325365	2	CABLE ASSEMBLY.. CA5A ALTERNATOR ROTOR TO COLLECTOR RING
-49	9326091	AR	CABLE .. 8 AWG. LF-500FT. (APPROX. 74 INCHES REQUIRED)
-50	8126873	2	LUG .. TERMINAL - 8 AWG. CABLE - 5/16 STUD
-51	8081935	4	LUG .. TERMINAL - CABLE TO COLLECTOR RING 3/8 STUD - SOLDER TYPE
-51	8126874	2	LUG .. TERMINAL - CABLE TO COLLECTOR RING 3/8 STUD - 8 AWG CABLE - CRIMP TYPE
-51	8130631	2	LUG .. TERMINAL - CABLE TO COLLECTOR RING 3/8 STUD 3 AWG CABLE - CRIMP TYPE
-52	8346065	1	BRACKET .. CONDUIT
-53	9417959	2	BOLT .. LOCK - BRACKET MOUNTING 3/8-16 * 3/4 HEX HEAD
-54	120394	2	WASHER .. PLAIN 3/8
-55	8120117	2	LOOM .. CABLE 5/8 I.D. * 6 INCHES LONG - D14
-55A	9085003	2	SLEEVE .. CABLE - CA5A

7 - AR10A5ALTERNATORFILTERAPPLICATION

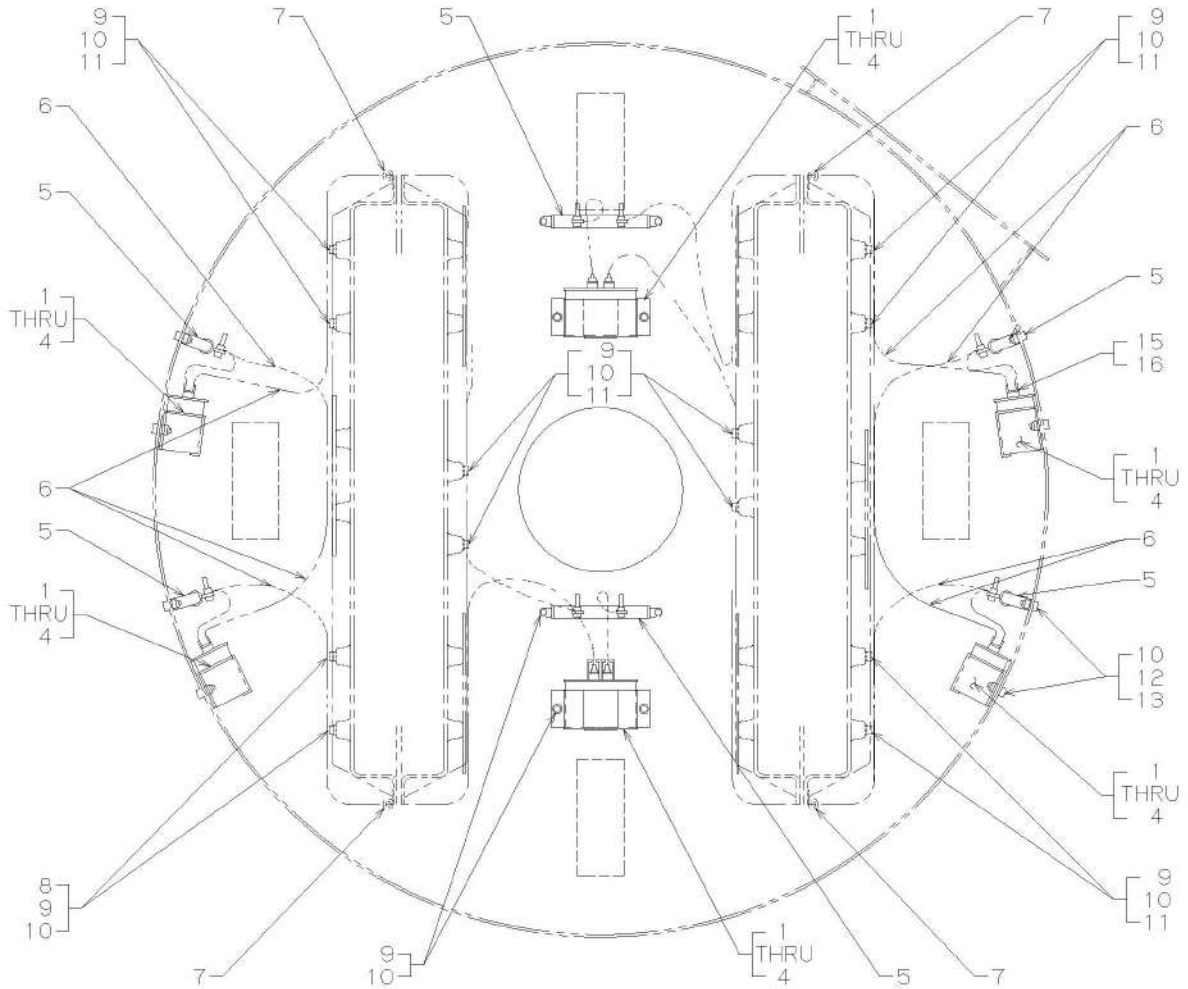





REF. NO.	PART NUMBER	QTY	DESCRIPTION
-1	8405701	6	KIT .. CAPACITOR
-2	9332014	6	CAPACITOR .. FILTER
-3	8391245	6	INSULATOR .. FILTER CAPACITOR



Haltic Endüstri İthalat İhracat ve Ticaret limited Sirketi.

REF. NO.	PART NUMBER	QTY	DESCRIPTION
-4	8391246	6	BRACKET .. CAPACITOR MOUNTING
-5	8380922	6	RESISTOR .. FILTER - 50HMS, 50WATTS
-6	8468612	AR	CABLE .. 12AWG - THIN WALL POLYOLEFIN, BLUE - 500 FOOT (APPROX. 26-1/2 FEET REQUIRED)
-7	9087833	4	CLAMP .. CABLE - INSULATED, 1/4 I.D. - 13/32 MOUNTING HOLE, TOP AND BOTTOM OF RECTIFIER BANKS
-8	8360926	2	CLAMP .. CABLE - INSULATED, 3/8 I.D.
-9	8239442	20	BOLT .. HEX HEAD LOCK 5/16-18 * 5/8, CABLE CLAMP MOUNTING
-10	120393	36	WASHER .. FLAT 5/16
-11	8360925	10	CLAMP .. CABLE - INSULATED, 1/4 I.D.
-12	180077	16	BOLT .. HEX HEAD 5/16-18 * 3/4, BRACKET AND RESISTOR MOUNTING
-13	8035145	16	NUT .. HEX LOCK 5/16-18
-14	8160085	AR	TAPE .. ELECTRICAL - 3/4 INCH * 30 YARDS
-15	8272337	12	TERMINAL .. RECEPTACLE - FAST ON TAB
-16	9520160	6	BOOT .. CAPACITOR FAST ON TERMINAL, DOUBLE
-17	8292368	12	LUG .. TERMINAL - NO. 10 STUD (NOTSHOWN)
-18	8301545	12	LUG .. TERMINAL -3/8 STUD (NOTSHOWN)

8 - RECTIFIER BANK

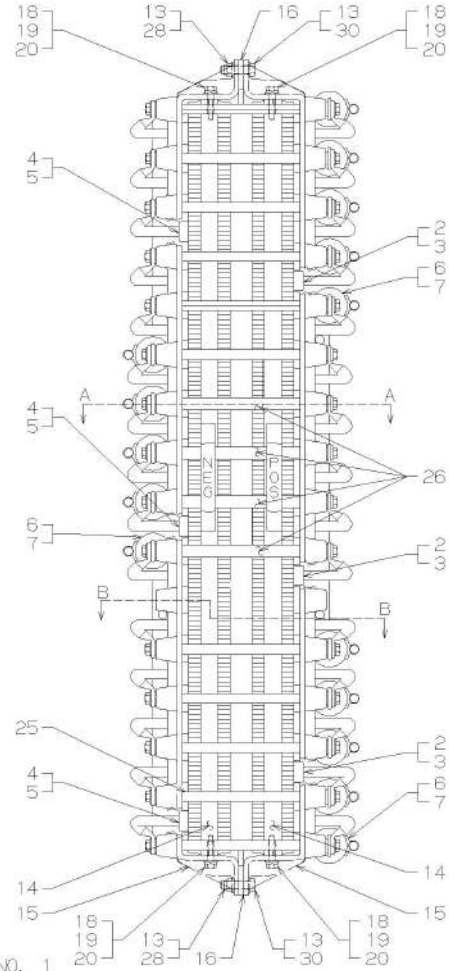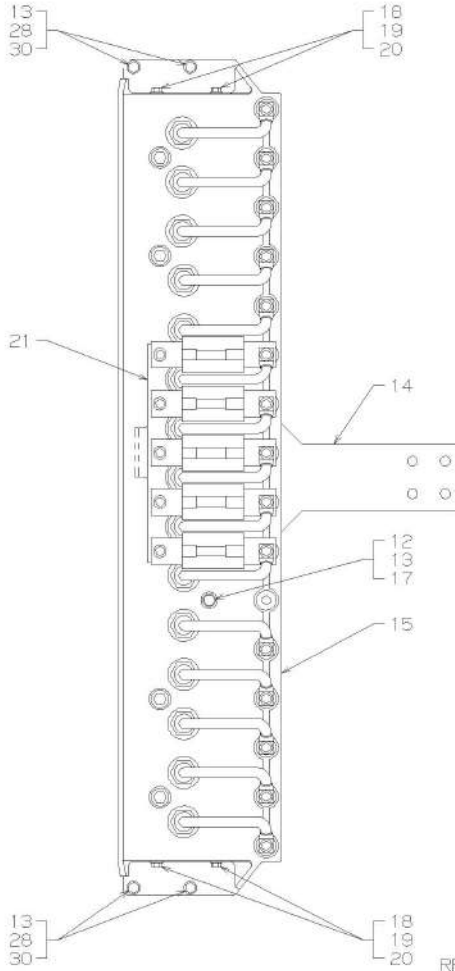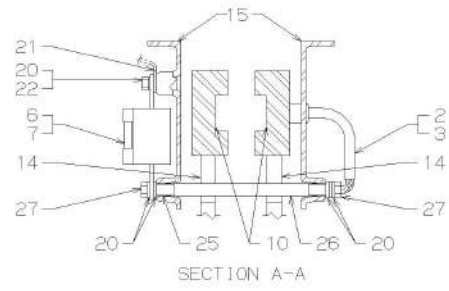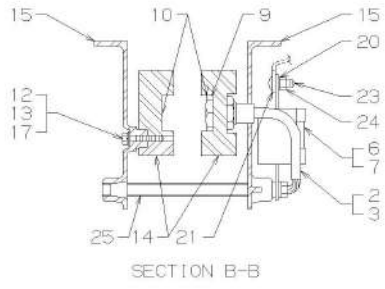




Haltic Endüstri İthalat İhracat ve Ticaret limited Sirketi.

REF. NO.	PART NUMBER	QTY	DESCRIPTION
-1	9084995	2	BANK ASSEMBLY .. RECTIFIER - GENERATOR, 2800 VOLTS, MOLDED
			THE FOLLOWING COMPONENT BREAK DOWN IS FOR ONE RECTIFIER BANK ONLY.
-2	40029132	15	DIODE .. SILICON-RECTIFIER BANK, POSITIVE BASE
-3	8378316	15	BOOT .. INSULATING - DIODE LEAD
-4	40029131	15	DIODE .. SILICON - RECTIFIER BANK, NEGATIVE BASE
-5	8378316	15	BOOT .. INSULATING - DIODE LEAD
-6	8346478	15	FUSE ASSEMBLY .. INDICATOR - DIODE, ALTERNATOR
-7	8386467	15	INDICATOR .. DIODE FUSE
-8	8389353	30	CLAMP .. FUSE INDICATOR (NOTSHOWN)
-9	40022670	30	NUT ASSEMBLY .. DIODE LOCK - INCLUDES WASHER
-10	8346492	6	RETAINER .. DIODE LOCKNUT
-11	180122	8	BOLT .. HEX HEAD 3/8-16*1 - LOCKNUT RETAINER
-12	120382	12	WASHER .. LOCK 3/8
-13	120394	20	WASHER .. FLAT 3/8
-14	8357508	2	HEAT SINK ASSEMBLY .. DIODE
-15	9085001	2	HOUSING ASSEMBLY .. RECTIFIER
-15A	9085004	6	INSERT .. HEX 5/16-18 (NOTSHOWN)
-16	40060878	2	PAD
-17	180128	4	BOLT .. HEX HEAD 3/8-16 * 1-3/4
-18	180079	8	BOLT .. HEX HEAD 5/16-18 * 1 - RECTIFIEREND
-19	120214	8	WASHER .. LOCK 5/16
-20	8379915	83	WASHER .. SPECIAL 5/16 - BRASS
-21	8346475	3	BUSBAR .. FUSE
-22	9425427	6	BOLT .. HEX HEAD 5/16-18 * 1
-23	8375722	9	BOLT .. ROUND HEAD 5/16-18 * 1-1/4
-24	8035145	5	NUT .. HEX LOCK 5/16-18
-25	8357460	15	BAR .. HEXAGON - DIODE MOUNTING
-26	9085003	4	SLEEVE .. INSULATING
-27	9417958	30	BOLT .. HEX HEAD 5/16-18 * 7/8 - DIODE TERMINAL TO BAR
-28	8035146	4	NUT .. HEX LOCK 3/8-16
-29	8346481	AR	COMPOUND .. JOINT - SOLD IN 5 OUNCE TUBE, APPLIED TO DIODE CONTACT AT REAR PRIOR TO MOUNTING (NOTSHOWN)

REF. NO.	PART NUMBER	QTY	DESCRIPTION
-30	180126	4	BOLT .. HEX HEAD 3/8-16 * 1-1/2

9 - ALTERNATOR CLOSURE

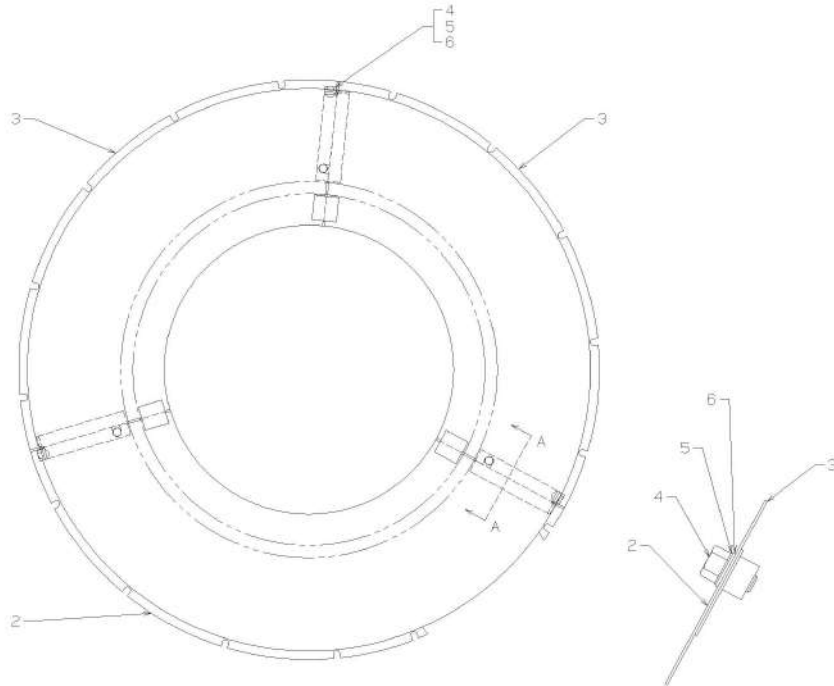

REF.NO.	PART NUMBER	QTY	DESCRIPTION
-1	8390572	1	CLOSURE ASSEMBLY .. ALTERNATOR
-2	8390570	1	SEGMENT ASSEMBLY .. CLOSURE - BOTTOM
-3	8390571	2	SEGMENT ASSEMBLY .. CLOSURE - TOP LEFT AND RIGHT
-4	180120	6	BOLT .. HEX HEAD 3/8-16 * 3/4 - SEGMENT TO SEGMENT



Haltic Endüstri İthalat İhracat ve Ticaret limited Sirketi.

REF.NO.	PART NUMBER	QTY	DESCRIPTION
-5	120382	6	WASHER .. LOCK 3/8
-6	120394	6	WASHER .. FLAT 3/8

HAVE ANY QUIRES?
GET IN TOUCH WITH US [HERE](#)